






www.yhcd.net

O 254x89 mm

Bearing Type :Ball bearing

Air Flow:600-850CFM

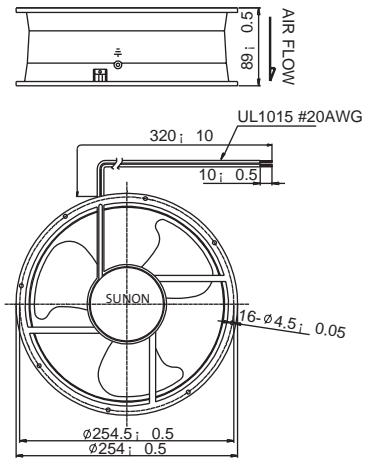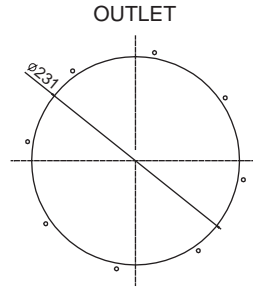

### AC Series

| Model     | P/N | Bearing<br>○ SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-HzO) | Noise<br>(dBA) | Weight<br>(g) |
|-----------|-----|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|----------------------------------|----------------|---------------|
| A1259-MBL | TC  | ○                             | 115                        | 50/60         | 0.23/0.23                 | 26/23                           | 1400/1600      | 600/665              | 0.27/0.36                        | 50/52          | 2000          |
| A1259-MBT | TC  | ○                             | 115                        | 50/60         | 0.23/0.23                 | 26/23                           | 1400/1600      | 600/665              | 0.27/0.36                        | 50/52          | 2000          |
| A2259-HBL | TC  | ○                             | 230                        | 50/60         | 0.24/0.27                 | 56/60                           | 2100/1900      | 850/770              | 0.40/0.38                        | 57/55          | 2000          |
| A2259-HBT | TC  | ○                             | 230                        | 50/60         | 0.24/0.27                 | 56/60                           | 2100/1900      | 850/770              | 0.40/0.38                        | 57/55          | 2000          |
| A2259-MBL | TC  | ○                             | 230                        | 50/60         | 0.15/0.13                 | 30/30                           | 1400/1600      | 600/665              | 0.27/0.36                        | 50/52          | 2000          |
| A2259-MBT | TC  | ○                             | 230                        | 50/60         | 0.15/0.13                 | 30/30                           | 1400/1600      | 600/665              | 0.27/0.36                        | 50/52          | 2000          |

Frame : Aluminum alloy

Specifications subject to change without notice

### BALL

