


产品说明 General Data

耐压Dielectric withstand voltage:AC 1500V (50/60Hz) one minute
 安全保护Protection:Impedance protection orthermal protection
 工作温度Operating Temperature: -10℃~+105℃
 使用寿命Life Expectancy: Ball bearing:over 40000 hr.(At40℃)
 安规认证Safety: TUV>CE>CCC
 重量Weight: 3800g



风量Airflow:1440 ~ 2242m3/hr 847-1320CFM
 相同产品The some of product:**300FZY-D**


尺寸图 Outline

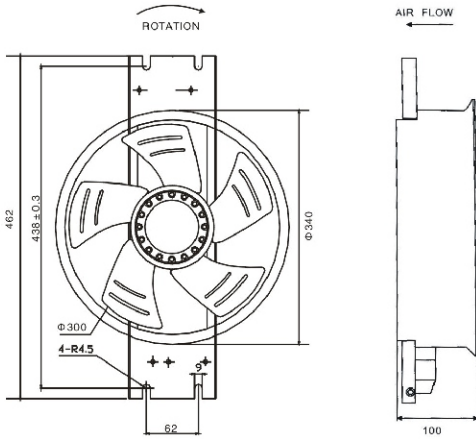


材料 Material

外框 Frame: All metal
 风叶 Impeller: Iron leaf
 马达 Motor: Capacitor-run external rotor induction motor
 连接方式Connection: The most stable wire

开孔尺寸 Panel Cut-outs



曲线图 Characteristic Curves

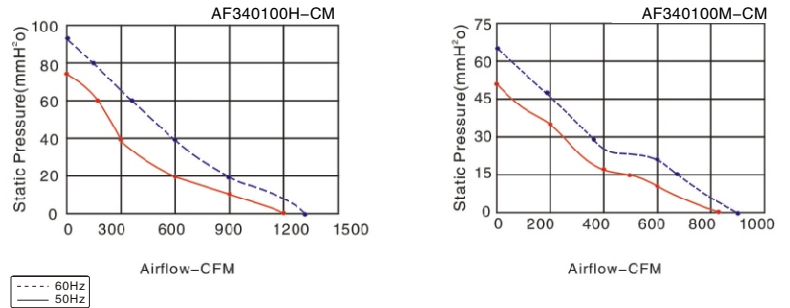

技术参数 Specifications

Model (型号)	Bearing system (轴承型式)	Voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	Air Flow(风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
AF340100MA ₂ B-CM	Ball	200-240	50/60	0.4	80	1300/1500	65/68	1440/1580	847/931	1	4.0uf/450v
AF340100MA ₂ B-CM		380-420	50/60	0.25	80	1300/1500	65/68	1440/1580	847/931	1	2.2uf/630v
AF340100MA ₂ B-CM		380-420	50/60	0.22	80	1300/1500	65/68	1440/1580	847/931	3	/
AF340100HA ₂ B-CM		200-240	50/60	0.8	160	2300/2700	70/73	2040/2242	1200/1320	1	4.0uf/450v
AF340100HA ₂ B-CM		380-420	50/60	0.5	160	2300/2700	70/73	2040/2242	1200/1320	1	2.2uf/630v
AF340100HA ₂ B-CM		380-420	50/60	0.45	160	2300/2700	70/73	2040/2242	1200/1320	3	/