

Blower

97 mm

San Ace B97

33mm thick



General Specifications **With a pulse sensor** Specifications for pulse sensors ⇨ Refer to Page 239

*Please inquire about other specifications.


- Material Frame: Plastics (Flammability: UL94V-0), Impeller: Plastics (Flammability: UL94V-0)
- Life Expectancy Varies for each model(L10:Survival rate: 90% at 60°C , rated voltage, and continuously run in a free air state)
- Lead Wire ⊕red ⊖black (Sensor) yellow
- Storage Temperature -30°C to +70°C (Non-condensing)

97 mm × 33 mm thick (Mass : 170g) 


Specifications

Model No.	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (A)	Rated Input (W)	Rated Speed (min ⁻¹)	Air Flow (m ³ /min) (CFM)	Static Pressure (Pa) (inchH ₂ O)	SPL (dB[A])	Operating Temperature Range (°C)	Life Expectancy (h)
9BAM12GC2	12	8.4 to 13.2	1.85	22.2	5,800	1.37 48.4	760 3.052	62	- 10 to + 60	40,000
9BAM12SC2			1.45	17.4	5,300	1.25 44.2	610 2.450	60		
9BAM12HC2			1.20	14.4	4,700	1.10 38.9	490 1.968	58		
9BAM12FC2			0.98	11.8	4,300	1.00 35.3	410 1.647	56		
9BAM24GC2	24	12.0 to 26.4	0.90	21.6	5,800	1.37 48.4	760 3.052	62		
9BAM24SC2			0.71	17.0	5,300	1.25 44.2	610 2.450	60		
9BAM24HC2			0.60	14.4	4,700	1.10 38.9	490 1.968	58		
9BAM24FC2			0.49	11.8	4,300	1.00 35.3	410 1.647	56		


Dimensions (Unit : mm)

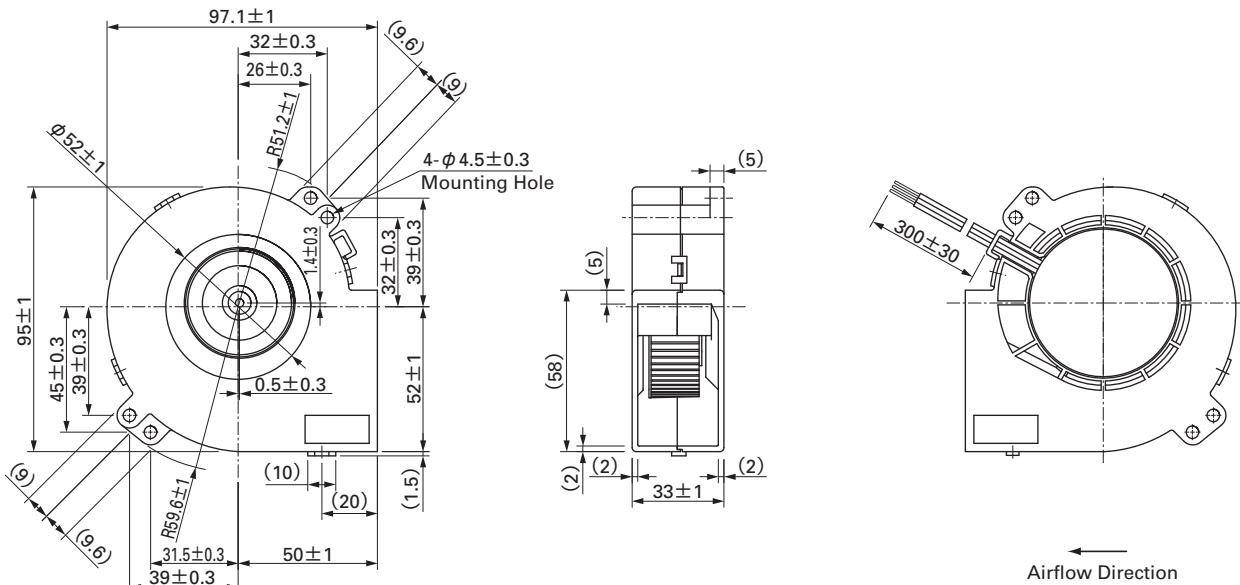


Air Flow and Static Pressure Characteristics

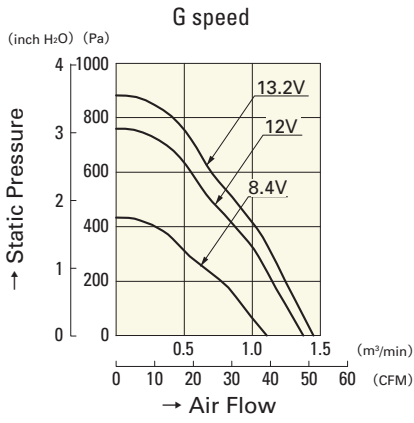


9BAM12GC2

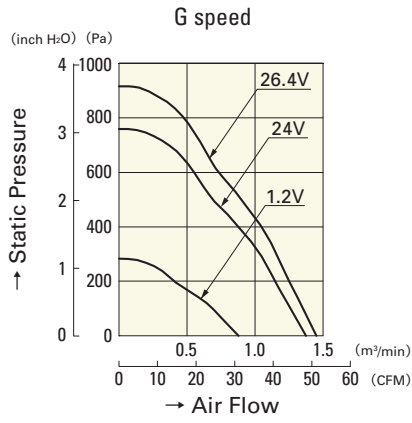


9BAM24GC2

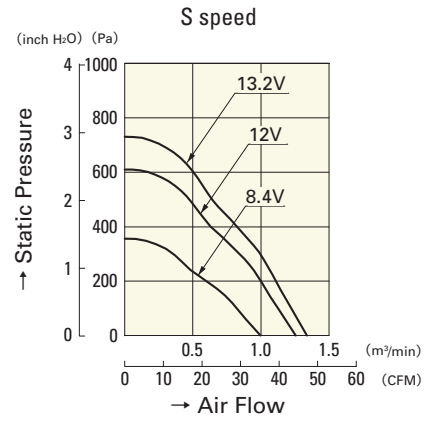


9BAM12SC2

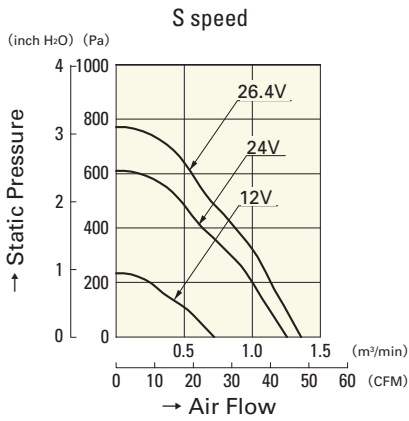


9BAM24SC2

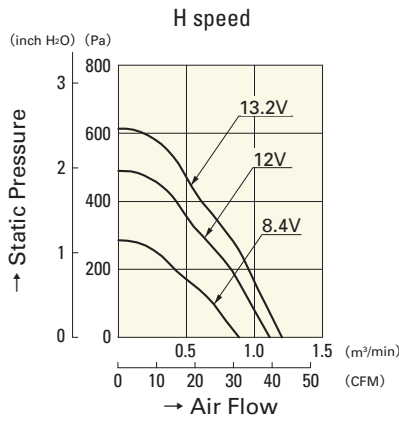


9BAM12HC2

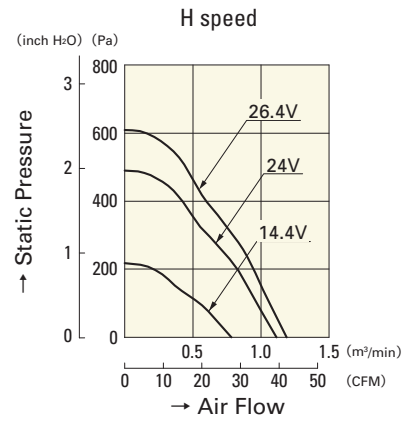

9BAM24HC2

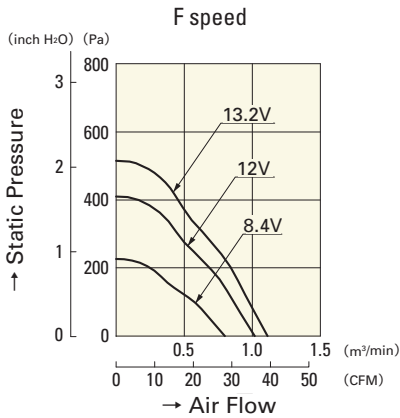

9BAM12FC2

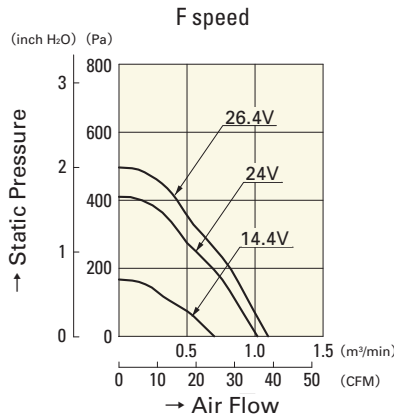

9BAM24FC2

Blower 97mm

97mm