


New




- * Bearing Type
Ball Bearings
- * Material
Impeller & Frame : Plastic(UL 94V-0)
- * Lead Wires :
UL 1007 AWG #24 OR Equivalent
Red Wire Positive(+)
Black Wire Negative(-)
- * Weight : 300g (10.58 OZ)


DIMENSIONS DRAWING

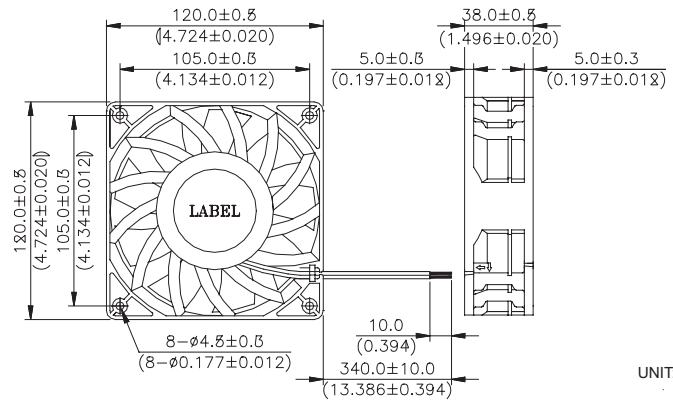

P & Q CURVE (AT RATED VOLTAGE)

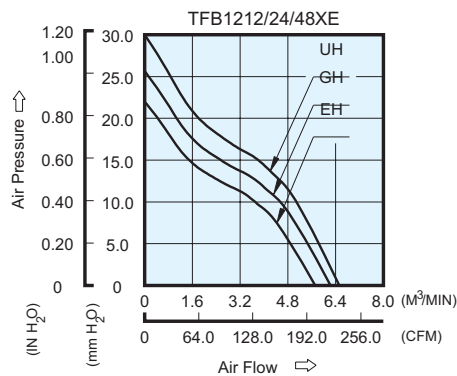

MOUNTING PANEL CUTOUT

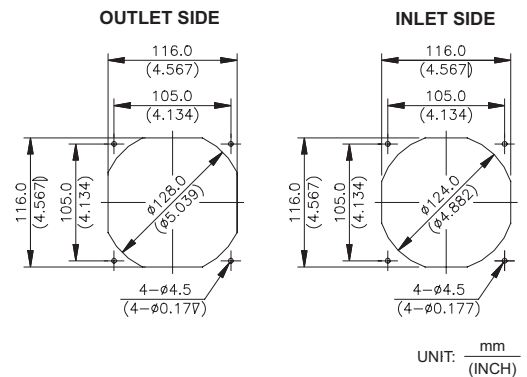

MODEL		Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
PART NO.	FUNCTION	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A
TFB1212EHE	-R00 / -F00	12	9.0 to 13.2	1.96	23.52	4200	5.688	200.88	22.04	0.868	62.5
TFB1224EHE	-R00 / -F00	24	18.0 to 27.0	0.86	20.64						
TFB1248EHE	-R00 / -F00	48	28.0 to 53.0	0.42	20.16						
TFB1212GHE	-R00 / -F00	12	9.0 to 13.2	2.45	29.40	4600	6.230	220.01	26.44	1.041	65.0
TFB1224GHE	-R00 / -F00	24	18.0 to 27.0	1.20	28.80						
TFB1248GHE	-R00 / -F00	48	28.0 to 53.0	0.65	31.20						
TFB1212UHE	-R00 / -F00	12	9.0 to 13.2	3.25	39.00	4900	6.636	234.35	30.00	1.181	67.5

- * Function type is optional.
- * The max. air flow and the speed are measured in free air ; max. air pressure is measured at zero air flow.
- * Noise is measured in anechoic chamber in free air, one meter from intake side.
- * All readings are typical values at rated voltage.
- * Specifications are subject to change without notice.

北京永宏诚大机电设备有限责任公司 电话:86-10-66131492
传真:86-10-66162242