





- * Bearing Type
Ball Bearings
- * Material
Impeller : Plastic (UL 94V-0)
Frame : Die-Cast Aluminum
- * Lead Wires :
UL 1007 AWG #24 OR Equivalent
Red Wire Positive (+)
Black Wire Negative (-)
- * Weight : 480g (16.93 oz)

DIMENSIONS DRAWING

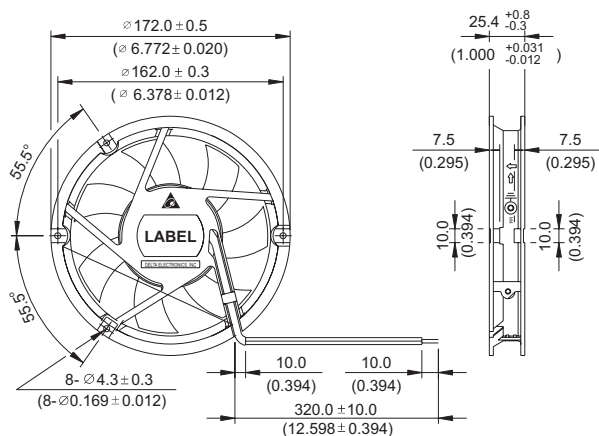


UNIT: mm
(INCH)

P & Q CURVE (AT RATED VOLTAGE)

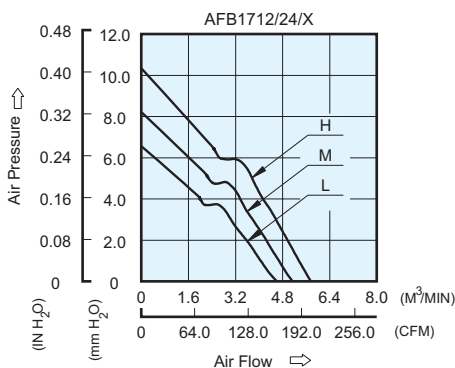

MOUNTING PANEL CUTOUT

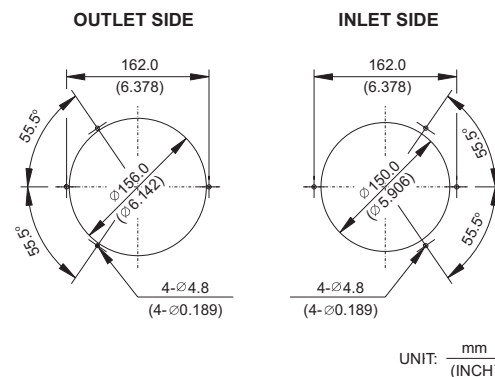

UNIT: mm
(INCH)

MODEL		Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
PART NO.	FUNCTION	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A
AFB1712L	-R00 / -F00	12	8.0 to 13.6	0.63	7.56	2400	4.621	163.19	6.56	0.258	44.5
AFB1724L	-R00 / -F00	24	12.0 to 27.6	0.36	8.64						
AFB1712M	-R00 / -F00	12	8.0 to 13.6	0.95	11.40	2700	5.168	182.51	8.22	0.324	47.5
AFB1712H	-R00 / -F00	12	8.0 to 13.2	1.42	17.04	3000	5.794	204.61	10.35	0.407	50.5

- * Function type is optional.
- * The max. air flow and the speed are measured in free air ; max. air pressure is measured at zero air flow.
- * Noise is measured in anechoic chamber in free air, one meter from intake side.
- * All readings are typical values at rated voltage.
- * Specifications are subject to change without notice.

北京永宏诚大机电设备有限责任公司 电话:86-10-66131492
传真:86-10-66162242