





- * Bearing Type
Ball Bearings
- * Material
Impeller & Frame : Plastic(UL 94V-0)
- * Lead Wires :
UL 1007 AWG #24 OR Equivalent
Red Wire Positive(+)
Black Wire Negative(-)
- * Weight : 410g (14.46 OZ)

DIMENSIONS DRAWING

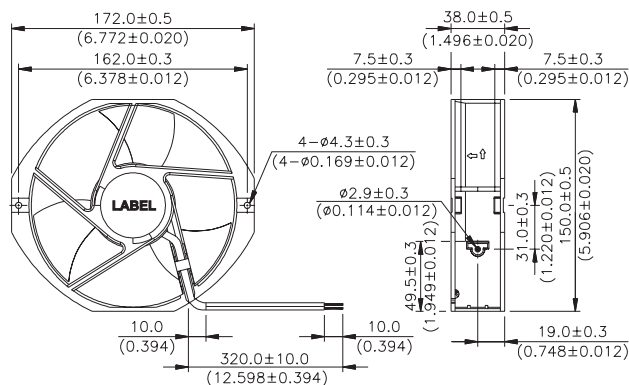


UNIT: $\frac{\text{mm}}{(\text{INCH})}$

P & Q CURVE (AT RATED VOLTAGE)

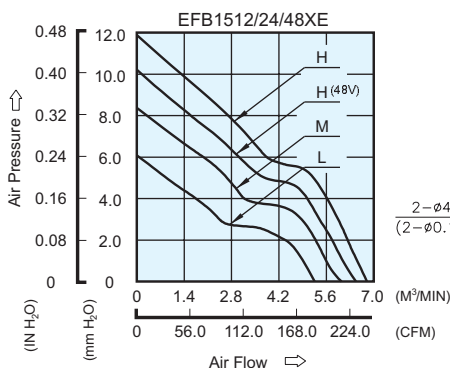

MOUNTING PANEL CUTOUT

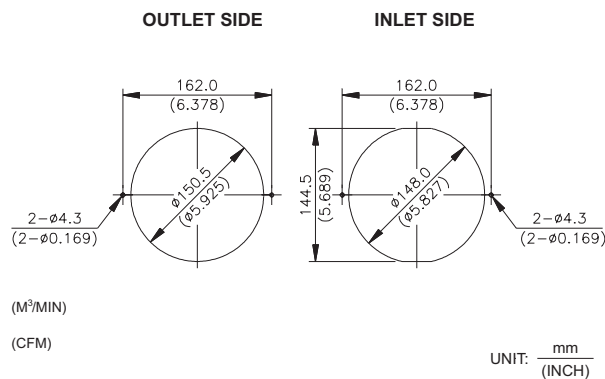

UNIT: $\frac{\text{mm}}{(\text{INCH})}$

MODEL		Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
PART NO.	FUNCTION	VDC	VDC	Amp	Watt	R.P.M.	M³/min	CFM	mmH₂O	IN H₂O	dB-A
EFB1512LE	-R00 / -F00	12	7.0 to 13.2	0.65	7.80	2500	5.301	187.20	6.09	0.240	47.5
EFB1524LE	-R00 / -F00	24	14.0 to 26.4	0.32	7.68						
EFB1548LE	-R00 / -F00	48	28.0 to 56.0	0.21	10.08						
EFB1512ME	-R00 / -F00	12	7.0 to 13.2	0.96	11.52	2900	6.049	213.62	8.37	0.330	51.5
EFB1524ME	-R00 / -F00	24	14.0 to 26.4	0.53	12.72						
EFB1548ME	-R00 / -F00	48	28.0 to 56.0	0.28	13.44						
EFB1512HE	-R00 / -F00	12	7.0 to 13.2	1.62	19.44	3300	6.797	240.03	11.89	0.468	56.0
EFB1524HE	-R00 / -F00	24	14.0 to 26.4	0.85	20.40						
EFB1548HE	-R00 / -F00	48	28.0 to 56.0	0.34	16.32						