


◀80X80X25mm Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,

External Dimensions

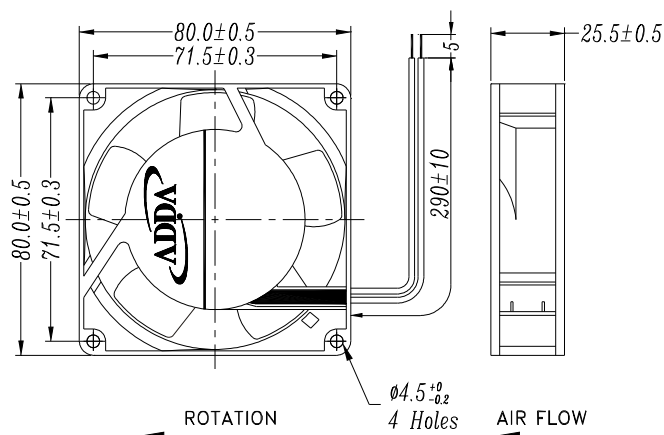

Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Ball bearing
Lead wire:UL1430AWG22
OPERATING TEMP*:-10C~70C
*:-10C~60C for fans with sleeve/ball combination bearings.



Specifications(Nominal)

*:Noise is measured at the distance of one(1) meter from the axis of intake.

Specifications (Nominal)												
Bearing type: ◎=Ball◎=Sleeve○=1B1S●=Hypro bearing												
Frame size	Model No.	Bearing System	Rated Volt./Freq	Rated Current	Rated Power	Rated Speed	Maximum AirFlow		Maximum Pressure		Noise Level	Weight
(mm)		Type	(v)	(A)	(W)	(rpm)	(CMM)	(CFM)	(InAq)	(mmAq)	(dB/A)	(g)
80x80x25	AA8251MB-AT	◎※	115/50	0.15	17.30	1900	0.413	14.6	0.060	1.500	18.3	210
			115/60	0.13	14.90	2500	0.535	18.9	0.110	2.750	24.0	
	AA8252MB-AT	◎※	230/50	0.07	16.10	1900	0.413	14.6	0.060	1.500	18.3	
			230/60	0.06	13.80	2500	0.535	18.9	0.110	2.750	24.0	
Specifications subject to change without notice.												

Specifications subject to change without notice.

Bearing type: ◎=Ball※=Sleeve○=1B1S●=Hypro bearing

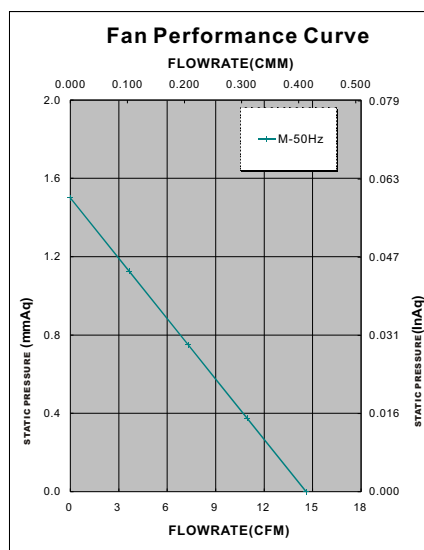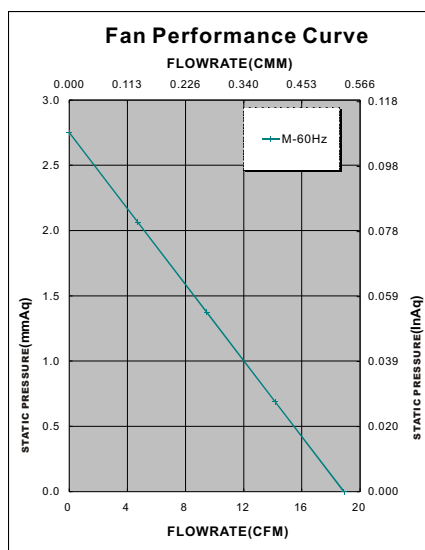

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B

*Safety approvals

