


◀ **45X45X08mm Series** ▶



Spot cooling, also suitable for small space requirements, laptops PC and notebook, etc.,

External Dimensions

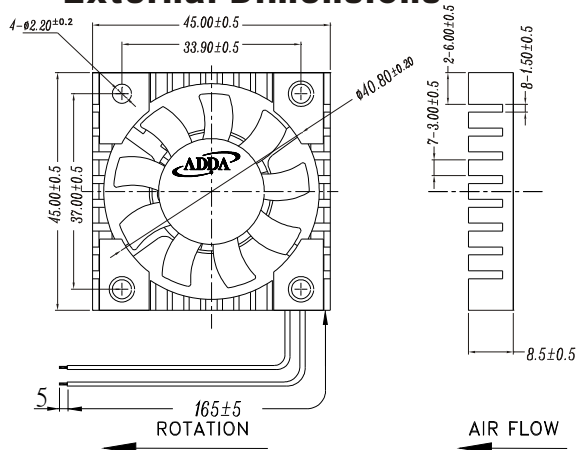

Frame: Plastic (UL:94v-0)
 Impeller: Plastic (UL:94v-0)
 Bearing: Hydro bearing
 Lead wire: UL1571AWG28
 OPERATING TEMP*: -10C~70C
 VOLTAGE AVAILABLE: 5V, 12V
 *: -10C~60C for fans with sleeve/ball combination bearings.

Specifications (Nominal)

*: Noise is measured at the distance of one (1) meter from the axis of intake.

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Bearing type: =Ball =Sleeve =1B1S =Hydro bearing				Noise Level (dB/A)	Weight (g)
							Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)		
45X45X08	AP4505HB-J90		5	0.12	0.60	6200	0.171	6.00	0.090	2.29	30.0	18
	AP4505MB-J90		5	0.09	0.45	5500	0.148	5.20	0.064	1.63	23.8	
	AP4505LB-J90		5	0.07	0.35	4500	0.120	4.20	0.044	1.12	19.5	
	AP4505HB-J96		5	0.12	0.60	6200	0.171	6.00	0.090	2.29	30.0	
	AP4505MB-J96		5	0.09	0.45	5500	0.148	5.20	0.064	1.63	23.8	
	AP4505LB-J96		5	0.07	0.35	4500	0.120	4.20	0.044	1.12	19.5	
	AP4512HB-J90		12	0.08	0.96	6200	0.171	6.00	0.090	2.29	30.0	
	AP4512MB-J90		12	0.06	0.72	5500	0.148	5.20	0.064	1.63	23.8	
	AP4512LB-J90		12	0.06	0.72	4500	0.120	4.20	0.044	1.12	19.5	
	AP4512HB-J96		12	0.08	0.96	6200	0.171	6.00	0.090	2.29	30.0	
	AP4512MB-J96		12	0.06	0.72	5500	0.148	5.20	0.064	1.63	23.8	
	AP4512LB-J96		12	0.06	0.72	4500	0.120	4.20	0.044	1.12	19.5	

Specifications subject to change without notice.

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

✓	✓			✓	

